



compact^{plus} TIME TO CARE


Infusomat[®] and Perfusor[®] compact^{plus} Time to Care











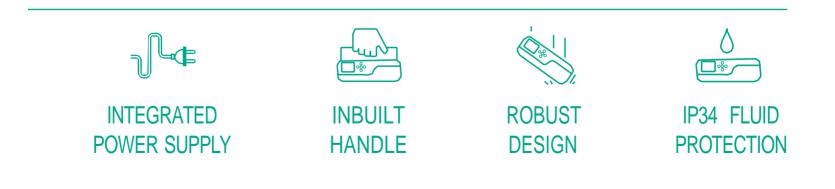

Perfusor[®] compact^{plus} Release Time to Care

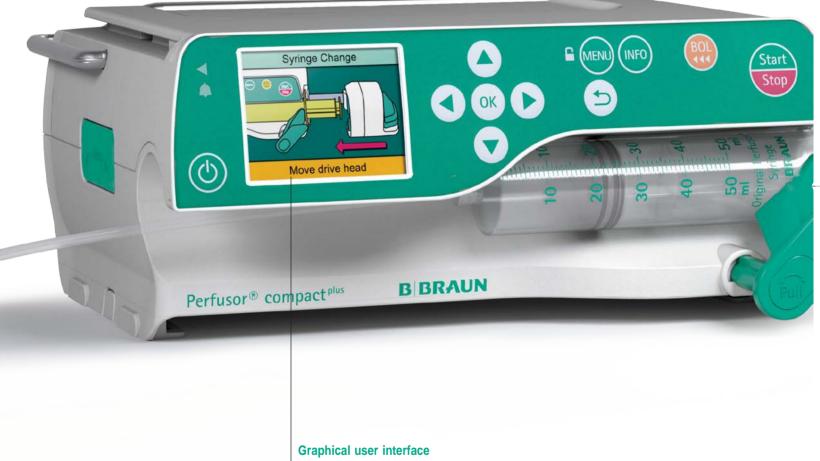

Intuitive operation and guided loading reduces training needs.

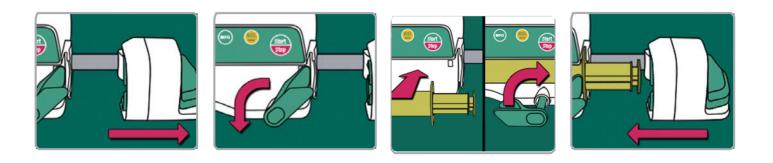



Flexibility Modular system for advanced and easy transport.

Syringe loading

Fast loading and start-up with improved safety due to semi-automatic drive.









Infusomat[®] compact^{plus} Release Time to Care



Anti Free-Flow Clamp

The Anti Free-Flow Clamp automatically closes the line to prevent any risk of free-flow when the door is opened.


Infusomat^{plus} Line

Colour codes and shapes make line insertion easy. Dedicated tubing material allows continued accuracy over long periods (96h).





THERAPY

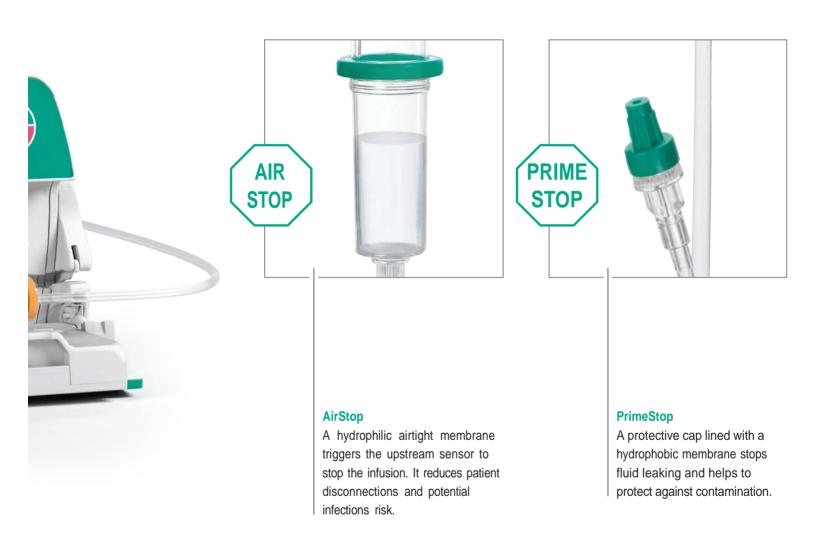




Advanced Workflow Saving Time to Care








Dose Error Reduction System (DERS) Time to Care

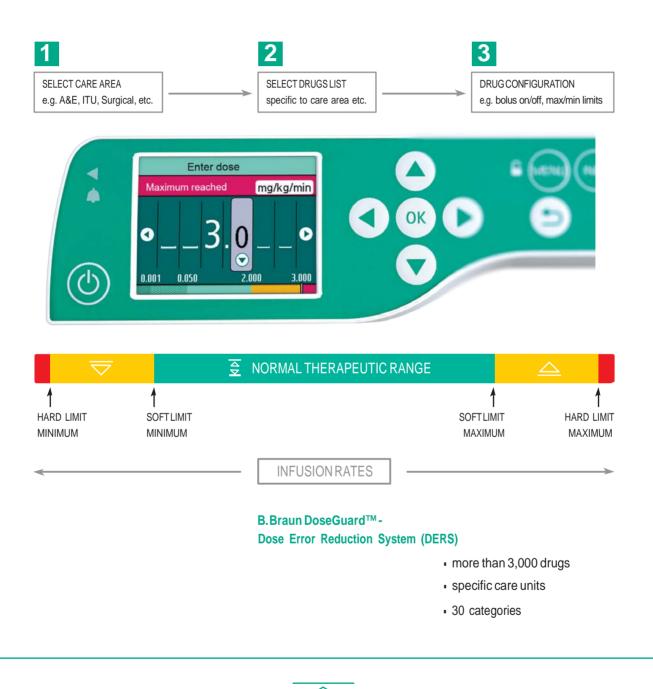

B. BRAUN

DOSEGUARD™

B. Braun OnlineSuite For Innovative Solutions

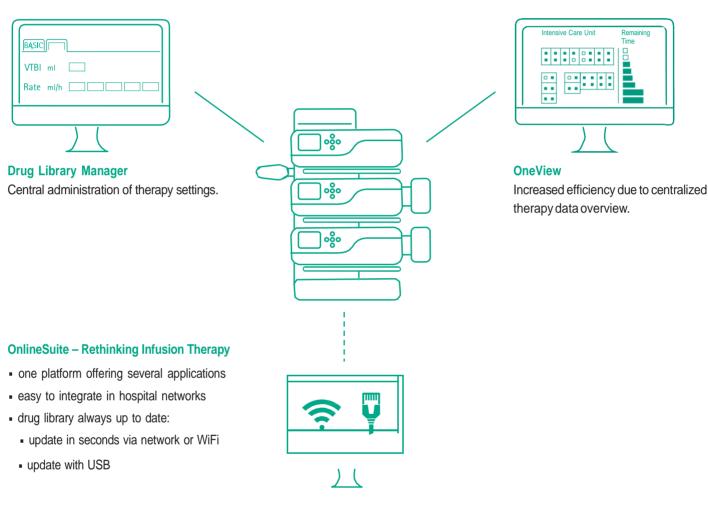

Upload Manager

Centralized upload via the clinical network allows always up to date drug library and device configuration.



B. BRAUN ONLINESUITE

Technical Data

Perfusor® compact ^{plus}	Description	
Туре	Infusion syringe pump	
Dimension	290 x 98 x 220 mm (W x H x D)	
Weight	2.3 kg	
Moisture	IP34 (water splashing from any direction)	
Display	Colour active matrix 2.4" TFT, 240 x 320 pixels, 262k colours, viewing angle: all 80°	290 mm
Battery	Rechargeable Li-Ion battery Operating time: approx. 10h at 25 ml/h Recharging time: approx. 4h	
Basal Rates	0.1-200 ml/h	
Accuracy	± 2% in compliance with IEC/EN 60601-2-24	
Bolus Rates	Delivery rate 1 - 1,800 ml/h	
Supported Syringe Manufacturer	B. Braun Original Perfusor® Syringe, Omnifix®, BD, Terumo Sizes: 2/3, 5, 10, 20, 30, 50/60 ml	
Drug Library	3,000 drugs including all parameters in up to 30 drug categories	
Code no. (REF)	8717030	

CLEANING AND DISINFECTION

Group	
Alcohols	Quaternary ammonium compounds
Meliseptol® New Formula	Hexaquart® forte
 Meliseptol® rapid 	 Hexaquart® plus
 Meliseptol® HBV Tissues 	 Hexaquart Plus lemon fresh
 Meliseptol® Foam pure 	 Hexaquart® S
 Meliseptol® Wipes sensitive 	
 Softa® Cloth CHX 2% 	
Aldehydes	Active chlorine
 Melsept® SF 	
• Melsitt®	Phenois
	Peroxides
Acid	Alkylamines

The above listed groups of cleaners are approved under consideration of the normal disinfection procedure according to the manufacturers' recommendation.

Infusomat® compact ^{plus}	Description	
Туре	Volumetric infusion pump	
Dimension	229 x 98 x 220 mm (W x H x D)	
Weight	1.9 kg	
Moisture	IP34 (water splashing from any direction)	
Display	Colour active matrix 2.4" TFT, 240 x 320 pixels, 262k colours, viewing angle: all 80°	Efformat ^{er} compare ^{en} B BRAUN 229mm
Battery	Rechargeable Li-Ion battery Operating time: approx. 5h at 25 ml/h - Recharging time: approx. 4h	
Basal Rates	0.1-1,200ml/h	
Accuracy	± 5% over 96 h	
Bolus Rates	Delivery rate 1 - 1,200 ml/h	
Supported Infusion Line	Infusomat ^{plus} Line	
Drug Library	3,000 drugs including all parameters in up to 30 drug categories	
Code no. (REF)	8717050	

Technical Data

Station compact ^{plus} Com	Description		
Туре	Docking station for up to 3 infusion pumps		· · · · · · · · · · · · · · · · · · ·
Dimension	305 x 375 x 202 mm (W x H x D)	_	
Weight	3.3 kg	375 mm	0
Moisture	IP34 (water splashing from any direction)	c.	-
Configuration	Tool-free assembly of up to 6 Station compact ^{plus}	1	
oomgaration	(max. 18 infusion pumps) in one or two pillars.		305 mm
Interface Type	- Infrared		
	- Staff call		
Accessory	Fixation for wall railing systems and pole systems		
Pole Clamp	For vertical mounting with integrated over-twist protection		
Code no. (REF)	8717141		

Cover compact ^{plus}	Description	
Туре	Cover for Station compact ^{plus}	Station compact*** DI BRAIN
Dimension	128x44x124 mm (WxHxD)	Station compact ⁴⁴ B ⁱ BRAUN
Weight	0.25 kg	128 mm
Moisture	IP34 (water splashing from any direction)	
Code no. (REF)	8717145	

Data module compact ^{plus}	Description	
Туре	Data module for Station compact ^{plus}	
Dimension	243x92x235 mm (WxHxD)	= [[[0000000]
Weight	1.1 kg	
Moisture	IP34 (water splashing from any direction)	
Interface Type	Data communication can be optionally integrated into a Station compact ^{plus} Com and allows data communication for up to 18 infusion pumps. Interfaces: Ethernet, 2 x USB, WiFi, HDMI, Mini DIN 9	243 mm
Code no. (REF)	8717160	

Accessories

Product	Description	Code no. (REF)
Universal Station Clamp	Clamp for fixation to wall rails and IV poles	8717142
Connection lead 12V	Connection lead for on-board 12V supply	8718020
Staff call cable compact ^{plus}	Staff call cable for Pump compact ^{plus}	8718030
Staff call cable	Staff call cable for Station Space 2 or compact ^{plus}	8718031
Pillar connection cable 60 cm	Connection cable to connect two pillars 60 cm	8718060
Pillar connection cable 120 cm	Connection cable to connect two pillars 120 cm	8718061
Pillar connection cable 1,000 cm	Connection cable to connect two pillars 1,000 cm	8718062

We developed our process concept to optimize workflows and enhance transparency. We have identified five constitutive stages of infusion, and we suggest products and services that are aligned with each process step.

As they all come from a single source, they are optimized for one another. We are thus creating advanced system solutions at every step. Join us in raising the bar in infusion therapy.





PATIENT ACCESS

PREPARATION

APPLICATION

DISCHARGE MANAGEMENT

B. Braun Melsungen AG | www.bbraun.com